

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

Helsinki 05.05.99

PCT / F / 199 / 00424

ETUOIKEUSTODISTUS  
PRIORITY DOCUMENT

REC'D 25 JUN 1999

WIPO PCT

Hakija  
Applicant

TELEFONAKTIEBOLAGET  
L M ERICSSON  
Stockholm, Sweden

Patentihakemus nro  
Patent application no

981105

Tekemispäivä  
Filing date

18.05.98

Kansainvälinen luokka  
International class

H 04Q

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Keksinnön nimitys  
Title of invention

"Call information output in a telecommunication network"  
(Puheluinformaation anto telekommunikaatioverkossa)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja  
jäljennöksiä patentti- ja rekisterihallitukselle alkuaan  
annetuista selityksestä, patenttivaatimuksista, tiivistelmästä  
ja piirustuksista.

This is to certify that the annexed documents are true copies  
of the description, claims, abstract and drawings originally  
filed with the Finnish Patent Office.

*Pirjo Kallä*  
Pirjo Kallä  
Tutkimussihteeri

Maksu 240,- mk  
Fee 240,- FIM

Osoite: Arkadiankatu 6 A  
Address: P.O.Box 1160  
FIN-00101 Helsinki, FINLAND

Puhelin: 09 6939 500  
Telephone: + 358 9 6939 500

Telefax: 09 6939 5204  
Telefax: + 358 9 6939 5204

## CALL INFORMATION OUTPUT IN A TELECOMMUNICATION NETWORK

Field of the Invention

5 The present invention relates to a method and apparatus for outputting call information in a telecommunication network.

Background to the Invention

10

In telecommunication networks such as fixed access networks and cellular radio telephone networks there is usually a need to record call information at at least one exchange of the network. This information may  
15 include the identity of a caller (A-number), the identity of the called party (B-number), and the duration of a call. In cellular radio telephone networks, the recorded information may also include the International Mobile Subscriber Identity (IMSI) code of  
20 the Subscriber Identity Module (SIM) used with the calling mobile telephone, and the International Mobile Equipment Identity (IMEI) code of the calling telephone itself. Both the IMSI and IMEI codes are typically sent by a mobile telephone to the cellular network during a  
25 call set-up phase. For a given call, a record stored in an exchange is normally output to a centralised billing system of the network upon termination of the call. Historically, this record has been referred to as a "Toll Ticket" (TT) although more recently the term "Call  
30 Data Record" (CDR) has been used.

---

US5,506,893 describes a telecommunication network in which a CDR is output from a switching centre to an external billing system upon termination of a call.

35

Summary of the Invention

According to a first aspect of the present invention there is provided a method of providing information  
5 relating to a telecommunication call, in a telecommunication network, to a data storage system, the method comprising:

receiving caller identity information at an exchange of the network during a call set-up procedure  
10 between a calling device and the exchange, and storing the information at least temporarily at the exchange;  
sending an incoming call alert message to a called device;

prior to receiving a call answer message at the  
15 exchange, or in direct response to receipt of a call answer message, outputting from the exchange to said data storage system a Call Data Record containing at least the received caller identity information.

20 Embodiments of the present invention provide for the output of call information at a very early stage in a call, i.e. immediately following the answering of the call or during the call set-up phase. This makes possible, for example, real-time billing and fraud  
25 detection prior to or during a call.

In certain embodiments of the present invention, the telecommunication network comprises a cellular radio telephone network and the call is made from a cellular  
30 radio telephone device. The exchange from which the call information is output is then the Mobile Switching Centre (MSC). The information may include at least one of the subscriber telephone number, IMEI code, IMSI code, or B-number.

35 In other embodiments of the present invention, the telecommunication network comprises a fixed access

network in which telephone device is coupled to the exchange via land lines. The information output by the exchange preferably includes the caller's telephone number (A-number) and the called number (B-number).

5

According to a second aspect of the present invention there is provided apparatus for providing information relating to a telecommunication call, in a telecommunication network, to a data storage system, the apparatus comprising:

10

first receiving means for receiving caller identity information at an exchange of the network during a call set-up procedure between a calling device and the exchange, and for storing the information at least temporarily at the exchange;

15

transmitting means for transmitting an incoming call alert message to a called device;

20

second receiving means for receiving, in the event that the called device answers or otherwise accepts the incoming call alert, a call answer message sent to the exchange; and

25

output means for outputting, prior to, or in response to, receipt of said call answer message, from the exchange to said data storage system, a Call Data Record containing at least the received caller identity information.

30

Preferably, said first and second receiving means, said transmitting means, and said output means are provided as an integral part of the network exchange. Where the network comprises a cellular radio telephone network, the exchange is a Mobile Switching Centre (MSC). The MSC may be contained within a housing which is physically spaced apart from an external billing system which is arranged to receive the Call Data Record output by the MSC. More preferably, a plurality of MSCs are

35

arranged to provide the output CDRs to a common external billing system.

According to a third aspect of the present invention  
5 there is provided a telecommunication network having a plurality of interconnected exchanges for routing calls in the network, and a common billing system coupled to each of said exchanges, each exchange comprising:

first receiving means for receiving caller identity  
10 information during a call set-up procedure between a calling device and the exchange, and for storing the information at least temporarily at the exchange;

transmitting means for transmitting an incoming call alert message to a called device or to a called  
15 device via one or more further exchanges;

second receiving means for receiving, in the event that the called device answers or otherwise accepts the incoming call alert, a call answer message sent to the exchange; and

20 output means for outputting, prior to or in response to receipt of said call answer message, from the exchange to a data storage system, a Call Data Record containing at least the received caller identity information.

25

#### Brief Description of the Drawings

For a better understanding of the present invention and in order to show how the same may be carried into effect  
30 reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows schematically a telecommunication network including a cellular radio telephone network;

Figure 2 is a flow diagram illustrating the method  
35 of operation of the telecommunication network of Figure 1; and

Figure 3 illustrates an external billing system shared by a number of Mobile Switching Centres of a cellular radio telephone network.

5 Detailed Description of Embodiments

There is shown in Figure 1 a telecommunication network comprising a Global System for Mobile Communications (GSM) cellular radio telephone network and a fixed  
10 access network. The former consists of a Mobile Switching Centre (MSC) 1, a set of Base Station Controllers (BSC) 2 only one of which is shown in Figure 1, and a set of Base Transceiver Stations (BTS) 3 again only one of which is shown in the Figure. The MSC,  
15 BSCs, and BTSS provide functionality as defined in the relevant European Telecommunications Standards Institute (ETSI) GSM standards.

In the GSM network, mobile stations such as that  
20 indicated by reference numeral 4 communicate with a BTS 3 over the air interface. User data and signaling messages are coupled between the BTS 3 and the MSC 1 via the BSC 2. The MSC 1 acts as an exchange of the GSM network, routing calls between a mobile station 4 and a  
25 called, or calling, station.

In the example of Figure 1, the destination of a call from the mobile station 4 is a land line telephone 5 which belongs to a subscriber of a fixed access network  
30 6. A call may be routed through several intermediate exchanges (e.g. in the case of an international call) and may also pass through several exchanges of the fixed access network, although for the sake of clarity these exchanges are not shown in Figure 1. In the same way,  
35 it will be appreciated that a call may be routed through several MSCs 1 en route from the mobile station 4 to the fixed line telephone 5.



The mobile station 4 is provided with a Subscriber Identity Module (SIM) 7 which contains a solid state memory arranged to store a unique International Mobile Subscriber Identity (IMSI) code. The mobile station 4 itself has a solid state memory arranged to store a second unique code known as an International Mobile Equipment Identity (IMEI) code. The form of these two codes is defined in the relevant GSM standard.

10

When a user of the mobile terminal 4 places a call to the fixed line telephone 5 by dialing the B-number of that telephone, at least the IMSI code and the telephone number (A-number) assigned to the mobile terminal 4 are transmitted to an input/output device 8 of the MSC 1 on a signaling channel of the GSM network (the IMEI code may or may not be sent at this stage). In response to the call request, the MSC 1 first verifies the right of the mobile terminal 4 to use the services of the GSM network on the basis of the A-number and the IMSI code (e.g. using a database of subscribers of the GSM network).

Assuming that the mobile terminal 4 receives authorisation from the MSC 1 to place the call, the MSC 1 transmits an incoming call request from an output/output device 9 to the fixed line telephone 5 via the fixed access telephone network. A signaling protocol such as the Signaling System 7 (SS7) is used to relay the request between the MSC 1 and the various exchanges. When the request reaches the fixed line telephone 5, the phone rings in the normal manner.

If the call is answered at the fixed line telephone 5, then a call answer message is returned to the fixed access network 6, either by the telephone 5 or by some intermediate device, e.g. a concentrator. The call

answer message is also transmitted back to the input/output device 9 of the MSC 1 of the GSM network, again using the SS7 signaling protocol.

5 Connected to the MSC 1 of the GSM network is a so-called input/output group device or external billing system 10. This may be a personal computer (PC), work station, data storage device or the like, which logs information concerning calls switched by the MSC 1. The information  
10 recorded by the external billing system 10 enables the operator of the GSM network to charge subscribers, trace calls, and identify calls made from "illegal" equipment. The latter is achieved using the transmitted IMSI code and also the IMEI code (if transmitted).

15

When the call answer message is received by the MSC 1 from the fixed line telephone 5, the MSC 1 provides a traffic channel (i.e. voice or data) to the mobile station 4 enabling the mobile subscriber to communicate  
20 with the fixed line telephone. In addition, receipt of the call answer message causes the MSC 1 to output to the external billing system 10, via an input/output device 11, the caller's A-number, IMSI code, the called party's B-number, and the call start time. This data is  
25 in the form of a partial Charging Data Record (CDR) and is recorded by the external billing system 10. When the call is terminated by one of the parties to the call hanging-up, a call termination message is received by the MSC, and a call end time output to the input/output  
30 group device 10 to complete the partial CDR.

Figure 2 is a flow chart illustrating the method of operation of the network of Figure 1, and relates in particular to the output of the CDR to the external  
35 billing system 10.

The external billing system is physically separate from the MSC (1) which is usually contained within a single large housing. By transferring the partial CDR, upon receipt of the call answer message from the B-subscriber, to the external billing system the network operator is able to access the record at an early stage in a call for the purposes already set out above.

The external billing system is typically shared by a number of MSCs 1 of the GSM network. This is illustrated in Figure 3.

It will be appreciated by the person of skill in the art that various modifications may be made to the above described embodiment without departing from the scope of the present invention. For example, the exchange from which the CDR is output may be an exchange of a fixed access network rather than that of a cellular radio telephone network. In another modification, the partial CDR is output from the exchange to the external billing system during the call set-up phase, i.e. prior to the call answer message being received at the exchange from the B-subscriber. The CDR provided to the external billing system may include additional information such as the MSC identity, and the originating/terminating cell identity (Cell Global Identity) in the GSM network.

Claims

1. A method of providing information relating to a telecommunication call, in a telecommunication network, to a data storage system, the method comprising:
- 5 receiving caller identity information at an exchange of the network during a call set-up procedure between a calling device and the exchange, and storing the information at least temporarily at the exchange;
- 10 sending an incoming call alert message to a called device;
- prior to receiving a call answer message at the exchange, or in direct response to receipt of a call answer message, outputting from the exchange to said
- 15 data storage system a Call Data Record containing at least the received and stored caller identity information.
2. A method according to claim 1, wherein the
- 20 telecommunication network comprises a cellular radio telephone network and the call is made from a cellular radio telephone device.
3. A method according to claim 2, wherein the cellular
- 25 radio telephone network is a GSM network and said exchange from which the Call Data Record is output is a Mobile Switching Center, the method comprising outputting from the Mobile Switching Center at least one of the subscriber telephone number, IMEI code, or IMSI
- 30 code.
- 
4. A method according to claim 1, wherein the telecommunication network comprises a fixed access network in which telephone device is coupled to the
- 35 exchange via land lines, the method comprising outputting from the exchange at least the caller's telephone number (A-number).

5. A method according to any one of the preceding claims and comprising outputting said call data record to an external billing system.

5

6. Apparatus for providing information relating to a telecommunication call, in a telecommunication network, to a data storage system (10), the apparatus comprising:

first receiving means (8) for receiving caller  
10 identity information at an exchange (1) of the network during a call set-up procedure between a calling device (4) and the exchange (1), and for storing the information at least temporarily at the exchange (1);  
transmitting means (9) for transmitting an incoming  
15 call alert message to a called device (5);

second receiving means (9) for receiving, in the event that the called device (5) answers or otherwise accepts the incoming call alert, a call answer message sent to the exchange (1); and

20 output means (11) for outputting, prior to or in response to receipt of said call answer message, from the exchange (1) to said data storage system (10), a Call Data Record containing at least the received and stored caller identity information.

25

7. Apparatus according to claim 6, wherein said first and second receiving means (8,9), said transmitting means (9), and said output means (11) are provided as an integral part of the network exchange (1), and said data  
30 storage system (10) is physically separate from the exchange (1).

8. Apparatus according to claim 6 or 7, the network comprising a cellular radio telephone network and said  
35 exchange (1) being a Mobile Switching Centre (MSC) of the cellular network.

9. A telecommunication network having a plurality of interconnected exchanges for routing calls in the network, and a billing system coupled to each of said  
5 exchanges, each exchange comprising:

first receiving means (8) for receiving caller identity information during a call set-up procedure between a calling device (4) and the exchange (1), and for storing the information at least temporarily at the  
10 exchange (1);

transmitting means (9) for transmitting an incoming call alert message to a called device (5) or to a called device (5) via one or more further exchanges (1);

second receiving means (9) for receiving, in the  
15 event that the called device (5) answers or otherwise accepts the incoming call alert, a call answer message sent to the exchange (1); and



output means (11) for outputting, prior to or in response to receipt of said call answer message, from  
20 the exchange (1) to a data storage system (10), a Call Data Record containing at least the received and stored caller identity information.

## Abstract (57)


A method of providing information relating to a telephone call, in a GSM cellular radio telephone network, to a data storage system (10). The method  
5 comprises receiving caller identity information at a Mobile Switching Centre (1) of the network during a call set-up procedure between a mobile station (4) and the MSC (1) and storing the information at least temporarily at the MSC (1). An incoming call alert  
10 message is sent by the MSC (1) to a called device (5). In the event that the called device (5) answers or otherwise accepts the incoming call alert, a call answer message is sent to the MSC (1). In response to receipt of the call answer message, at least the  
15 received and stored caller identity information is output from the MSC (1) to the data storage system (10).

Fig. 1

20

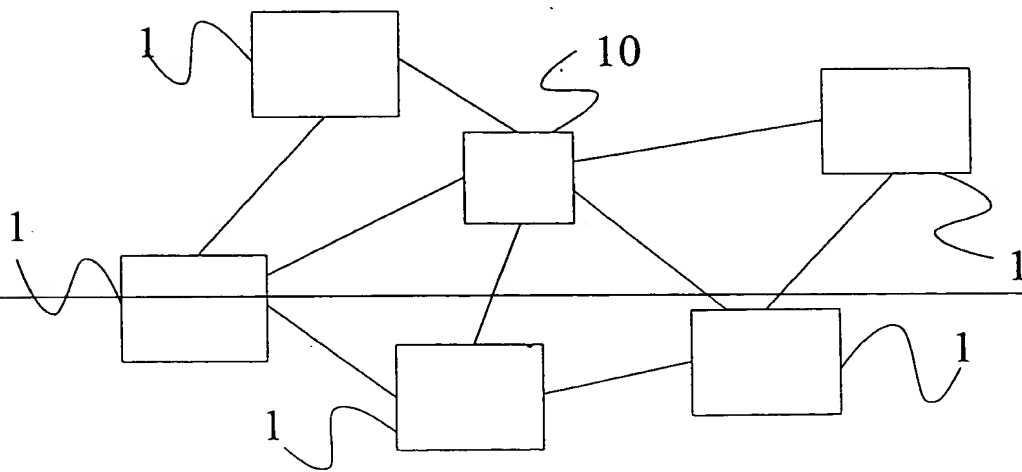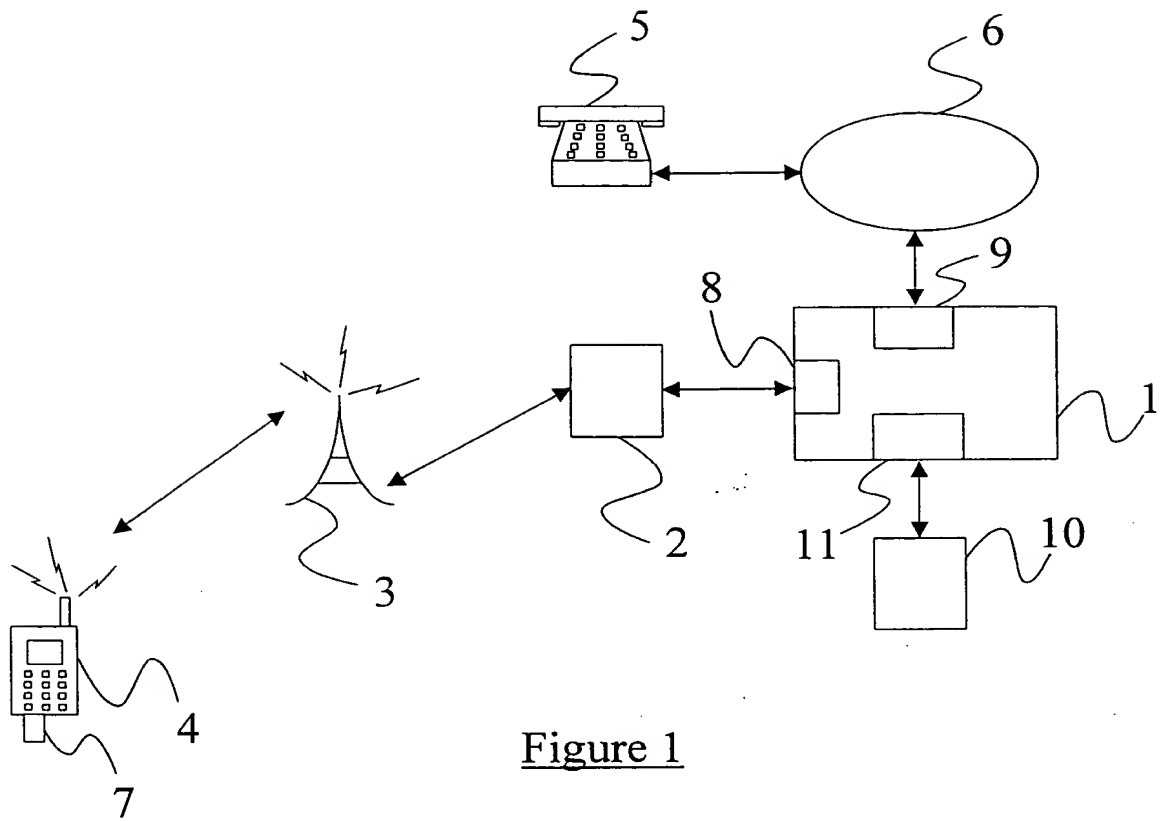

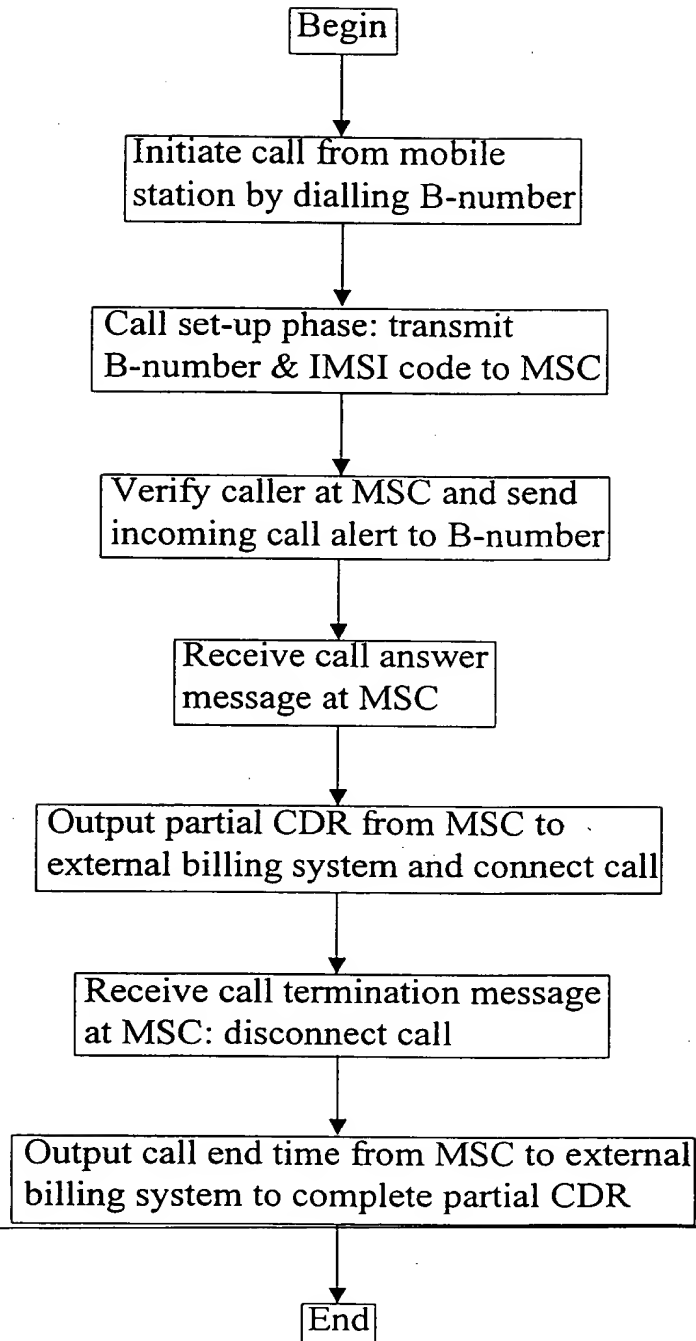

Figure 2

**THIS PAGE BLANK (USPTO)**